



# EXAMGOOD

## QUESTION & ANSWER

Exam Good provides update free of charge in one year!

Accurate study guides  
High passing rate!

<http://www.examgood.com>

**Exam** : **642-145**

**Title** : Implementing Cisco IOS  
Unified Communications  
Advanced

**Version** : DEMO

1. Your IP telephony manager wants you to configure an FXS port on a voiceenabled router with these requirements: 1) It supports groundstart signaling. 2) Calling name is James Smith. 3) Calling number is 4085551212. 4) Ring frequency is 25hz. 5) Ring cadence is for Germany. Which configuration will meet these requirements?

A. voiceport 1/0/0 signal groundstart cptone DE ring frequency 25 stationid name James Smith stationid number 4085551212

B. voiceport 1/0/0 description extension 5551212, name "James Smith" signal groundstart ring cadence DE ring frequency 25

C. voiceport 1/0/0 description extension 5551212, name "James Smith" ring cadence Germany ring frequency 25 stationid name James Smith stationid number 5551212

D. voiceport 1/0/0 signal groundstart cadence Germany frequency 25 stationid name James Smith stationid number 4085551212

Answer:A

2. What is the best practice of configuring an intercom on a shared line?

A. This feature allows all endpoints to participate in intercom messages.

B. This feature allows one endpoint to contact multiple endpoints simultaneously.

C. This feature is not supported and should not be used.

D. This feature can be used only when the intercom ephonedn is configured as a dual line.

E. This feature can be supported only in a unidirectional manner.

Answer: C

3. Refer to the exhibit. When two separate calls, FXO and PRI, arrive at the following Cisco Unified Communications Manager Express router, which statement about call behavior is true?

```
ccntroller T1 0/2/0
framing esf
linecode b8zs
pri-group t:meslots 1-4,24
!
vcice-port 0/1/0
connectionplar 2151
!
vcice-port 0/2/0:23
!
dial-peer vcice 50 pots
incoming called-number .%
port 0/1/0
!
dial-peer vcice 123 pots
incoming called-number .
direct-inward-dial
```

- A. TheFXOcall matches dialpeer 50pots andsucceeds, andthePRI call matches dialpeer 123pots,but it fails due to a missing port statement.
- B. ThePRI call matches dialpeer 50pots andsucceeds, andtheFXOcallmatches dialpeer 123pots,but it fails due to a missing port statement.
- C. The FXOcall matches dialpeer 50pots, andthe PRI call matches dialpeer 123pots, but bothcalls fail due to misconfiguration.
- D. The FXO call matches dialpeer 50 pots, the PRI call matches dialpeer 123 pots, and both calls succeed.
- E. The PRI call matches dialpeer 50 pots, the FXO call matches dialpeer 123 pots, and both calls succeed.

Answer: D

4. Refer to the exhibit. The Saratoga Softball League is setting up Call Transfer for its Cisco Unified CallManager Express solution, which uses version 4.0. The network supports the H.450 standards. What will be used to execute the transfer?

**SaratogaSL(config-telephony-service)#transfer-system blind**

- A. Tcl script

B. hairpin routing

C. H.450.2 standard

D. H.450.3 standard

E. proprietary Cisco method

Answer: E

5. Refer to the exhibit. CiscoUnityExpress is not registeredto a CiscoUnifiedMessaging Gateway. What is causing this condition?

```
CUE1# sh messaging-gateway
Messaging gateways :
***Output omitted***
Primary messaging gateway :
  10.1.1.10
  Status : Not Registered
  Location-id : 10
  Reg-id : CME1
  Reg-password : (Not displayed)
  Retry-interval : 5 minute(s)
Secondary messaging gateway :
  Status : Not Configured

CUE1# sh running-config
Generating configuration:
***Output omitted***
network location id "11"
  abbreviation "CME1"
  email domain 192.168.1.10
  name "CME1"
  voicemail extension-length min 4 max 8
end location
network location id "12"
  abbreviation "CME2"
  email domain 192.168.2.10
  name "CME2"
  voicemail extension-length min 4 max 8
end location
network local location id 11
security password lockout policy temp-lock
security pin lockout policy temp-lock
service phone-authentication
end phone-authentication
service voiceview
  enable
end voiceview
messaging-gateway primary 10 10.1.1.10
  username CME1 password encrypted
  "J3+trZ39ZxE55ik27qsefknfGwTYHfMPsd8ZZNgd+Y9J3x1k2B35j0nfGwTYHfMPsd8ZZNgd+Y9J3x1
  k2B35j0nfGwTYHfMPsd8ZZNgd+Y9J3x1k2B35j0nfGwTYHfMP"
end messaging-gateway
```

A. Local location ID should be changed to be "10".

- B. The messaginggateway registration command is not configured.
- C. Cisco Unified Messaging Gateway location is not defined.
- D. Email domains are not on the same subnet.
- E. VoiceView cannot be enabled.

Answer: B

6. Which two configuration snips will configure two ephonedns that will function as a private intercom between "Sales Mgr" and his "Sales Admin"? The intercom must automatically answer and not require any direct phone intervention from the administrator to speak with the manager. (Choose two.)

```
ephone-dn 90
 number 5000
 name "Sales Admin"
 intercom 4999 label "Sales Admin"
```

A.

```
ephone-dn 91
 number 4999
 name "Sales Mgr"
 intercom 5000 label "Sales Mgr"
```

B.

```
ephone-dn 90
 number 5000
 name "Sales Admin"
 intercom 4999 label "Sales Admin" no-mute
```

C.

```
ephone-dn 91
 number A4999
 name "Sales Mgr"
 intercom A5000 label "Sales Mgr"
```


D.

```
ephone-dn 90
 number A5000
 name "Sales Admin"
 intercom A4999 label "Sales Admin" no-mute
```

E.

Answer: DE

7. Refer to the exhibit. The Greene Supply Company is integrating Cisco Unified CallManager Express into a SIP network. Which two statements are accurate? (Choose two.)

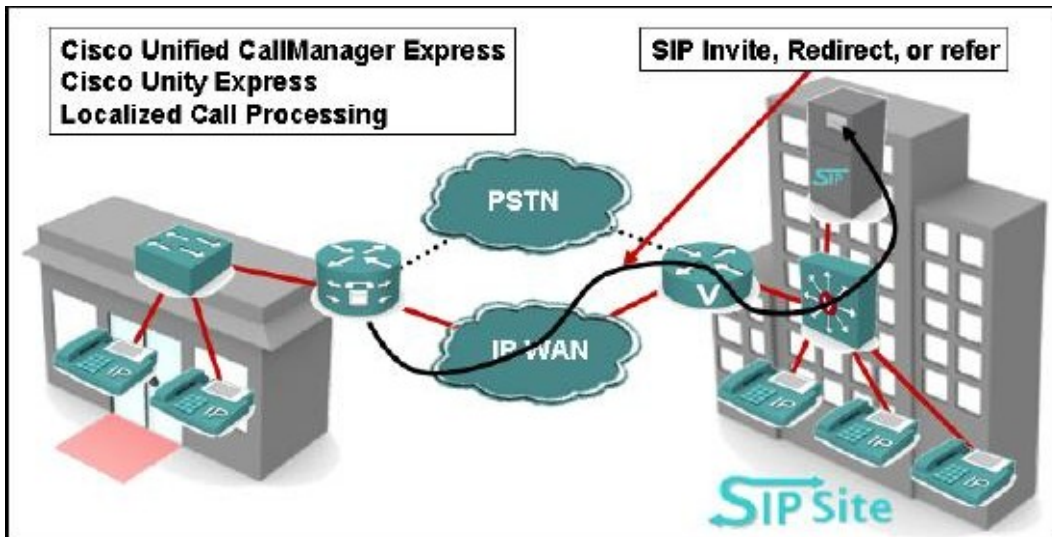

- A. SIP support in dial peers is a Cisco IOS function.
- B. Use the notifybased DTMF relay mechanism that is proprietary to Cisco.
- C. SIP support in Cisco IOS is a function of localized call processing integrated with Cisco Unity Express.
- D. Use either the notifybased DTMF relay mechanism that is proprietary to Cisco or the RFCbased DTMF relay.
- E. The SIP server must be configured for the E.164 numbers that are going to register with the Cisco CallManager Express database.

Answer:AD

8. Which mode allows you to configure the BACD service provided in Cisco Unified Communications Manager Express?

- A. Tcl
- B. telephony
- C. application
- D. IPtelephony
- E. telephonyservice

Answer: C

9. Refer to the exhibit. Which command can be used to override all the blocked patterns in the afterhours configuration?

```
Acme1(config)#telephony-service
Acme1(config-telephony)#after-hours day mon 17:00 08:00
Acme1(config-telephony)#after-hours day tues 17:00 08:00
Acme1(config-telephony)#after-hours day wed 17:00 08:00
Acme1(config-telephony)#after-hours day thurs 17:00 08:00
Acme1(config-telephony)#after-hours day fri 17:00 08:00
Acme1(config-telephony)#after-hours day sat 17:00 08:00
Acme1(config-telephony)#after-hours day sun 17:00 08:00
Acme1(config-telephony)#after-hours block pattern 9011T 7-24
Acme1(config-telephony)#after-hours block pattern 91[2-9]..[2-9].....
Acme1(config-telephony)#after-hours block pattern 919[0,7][0,6]..... 7-24
Acme1(config-telephony)#after-hours block pattern 9[2-9]..[2-9].....
```

- A. Configure the afterhours exempt command under the ephonedn command.
- B. Configure the pin command under the ephone command.
- C. Configure the afterhours exempt and pin commands under the ephonedn command.
- D. Configure the no afterhours block pattern command under the ephone command.

Answer:A

10. Acme Co. is using a Cisco Unified Messaging Gateway to network two of their Cisco Unified Communications Manager Express/Cisco UnityExpress sites to each other. Site11is running CiscoUnity Express 2.3.4 and Cisco Unified Communications Manager Express 3.2 and site 12 is running Cisco Unified Communications Manager Express 4.2(0) and Cisco Unity Express 3.1. One of the sites autoregisters correctly with the Cisco Unified Messaging Gateway, but the other site does not. Which site is not autoregistering and what is the reason it is not registering? (Choose two.)

- A. Site 11 is not autoregistering.
- B. Cisco Unified Communications Manager Express 4.2 does not support Cisco Unified Messaging Gateway autoregistration.
- C. Site 12 is not autoregistering.
- D. Cisco Unity Express 2.3.4 does not support Cisco Unified Messaging Gateway autoregistration.
- E. Cisco Unity Express 3.1 does not support Cisco Unified Messaging Gateway autoregistration.
- F. Cisco Unified Communications Manager Express 3.2 does not support Cisco Unified Messaging Gateway autoregistration.

Answer:AD

11. Jerry's Fish Farm is installing in a Cisco Unified Communications Manager Express system at their new Sales facility. The office has 4 sales people that handle all incoming sales calls. The manager does not want to



have to have a receptionist to answer and route calls, so he wants all of the sales people phones to have the main sales phone number. He also wants them to all ring at the same time, allowing the first available sales person to answer the call. What type of phone system model should they deploy?

- A. Octel
- B. Key
- C. Centrex
- D. PBX
- E. PSTN

Answer: B

12. Refer to the exhibit. A configuration has been proposed for VPIM networking between two Cisco Unified Communications Manager Express routers using Cisco Unity Express. What component of the proposed configuration must be changed for this configuration to function properly?

```
network location id "11"  
  abbreviation "CME1"  
  email domain 192.168.1.10  
  name "CME1"  
  voicemail broadcast vpim-id CME1-broadcast  
  voicemail vpim-encoding G729  
  voicemail extension-length 4  
end location  
  
network location id "12"  
  abbreviation "CME2"  
  email domain 192.168.2.10  
  name "CME2"  
  voicemail broadcast vpim-id CME2-broadcast  
  voicemail vpim-encoding G729  
  voicemail extension-length 4  
end location|
```

- A. Location IDs are invalid.
- B. Email domain syntax is incorrect, must use DNS for VPIM networking.
- C. VPIM broadcast IDs are invalid.
- D. VPIM encoding is invalid.
- E. Domains are not on the same network.

Answer: D

13. Refer to the exhibit. Which analog extension rings when an incoming call to 2151 arrives at FXO voiceport 0/0/0?

```
voice translation-rule 1
 rule 1 /*./ /2152;
 !
 voice translation-profile pstn-in
  translate called 1
 !
 voice-port 0/0/0
  translation-profile incoming pstn-in
  connection plar 2151
 !
 voice-port 0/1/0
  station-id number 2151
 !
 voice-port 0/1/1
  station-id number 2152
 !
 dial-peer voice 50 pots
  incoming called-number .%
  port 0/0/0
 !
 dial-peer voice 2151 pots
  destination-pattern 2151
  port 0/1/0
 !
 dial-peer voice 2152 pots
  destination-pattern 2152
  port 0/1/1
```

- A. Extension 2152 rings.
- B. Extension 2151 rings.
- C. The call fails because the voice translation rule conflicts with connection plar.
- D. Extension 2152 rings first and 2151 rings next.
- E. Both extensions ring simultaneously.

Answer: B

14. Which figure shows E&M voiceport configuration?

```
voice-port 0/3/0
operation 2-wire
type 1
signal wink-start
```

A.

```
voice-port 0/0/0
operation 4-wire
type 1
signaling wink-start
```

B.

```
voice-port 0/0/0
operation 2-wire
type 2
signaling wink-start
cptone AU
```

C.

```
voice-port 0/2/0
signaling loopstart
cptone GB
station-id number 1781
ring number 3
```

D.

```
voice-port 0/2/0
signal loopstart
cptone GB
station-id number 1781
ring number 3
```

E.

```
voice-port 0/2/0
 signal loopstart
 cptone GB
 station-id number 1781
 ring number 2
```

F.

Answer:A

15. An

IT manager has been trying to configure Cisco Unified CallManager Express without success. The IT manager has decided that there might be more success with the Automated Setup Utility. To start this process, what command should be executed first?

- A. autosetup
- B. auto assign
- C. no telephony-service
- D. auto telephony-service
- E. telephony-service auto
- F. telephony-service setup

Answer: C