



EXAMGOOD

QUESTION & ANSWER

Exam Good provides update free of charge in one year!

Accurate study guides
High passing rate!

<http://www.examgood.com>

Exam : **642-524**

Title : **Securing Networks with ASA
Foundation**

Version : **DEMO**

1. Tom works as a network administrator for the P4S company. The primary adaptive security appliance in an active/standby failover configuration failed, so the secondary adaptive security appliance was automatically activated. Tom then fixed the problem. Now he would like to restore the primary to active status. Which one of the following commands can reactivate the primary adaptive security appliance and restore it to active status while issued on the primary adaptive security appliance?

- A. failover reset
- B. failover primary active
- C. failover active
- D. failover exec standby


Correct: C

2. For the following commands, which one enables the DHCP server on the DMZ interface of the Cisco ASA with an address pool of 10.0.1.100-10.0.1.108 and a DNS server of 192.168.1.2?

- A. dhcpd address 10.0.1.100-10.0.1.108 DMZ dhcpd dns 192.168.1.2 dhcpd enable DMZ
- B. dhcpd address range 10.0.1.100-10.0.1.108 dhcpd dns server 192.168.1.2 dhcpd enable DMZ
- C. dhcpd range 10.0.1.100-10.0.1.108 DMZ dhcpd dns server 192.168.1.2 dhcpd DMZ
- D. dhcpd address range 10.0.1.100-10.0.1.108 dhcpd dns 192.168.1.2 dhcpd enable

Correct: A

3. Look at the following exhibit carefully, which one of the four diagrams displays a correctly configured network for a transparent firewall?

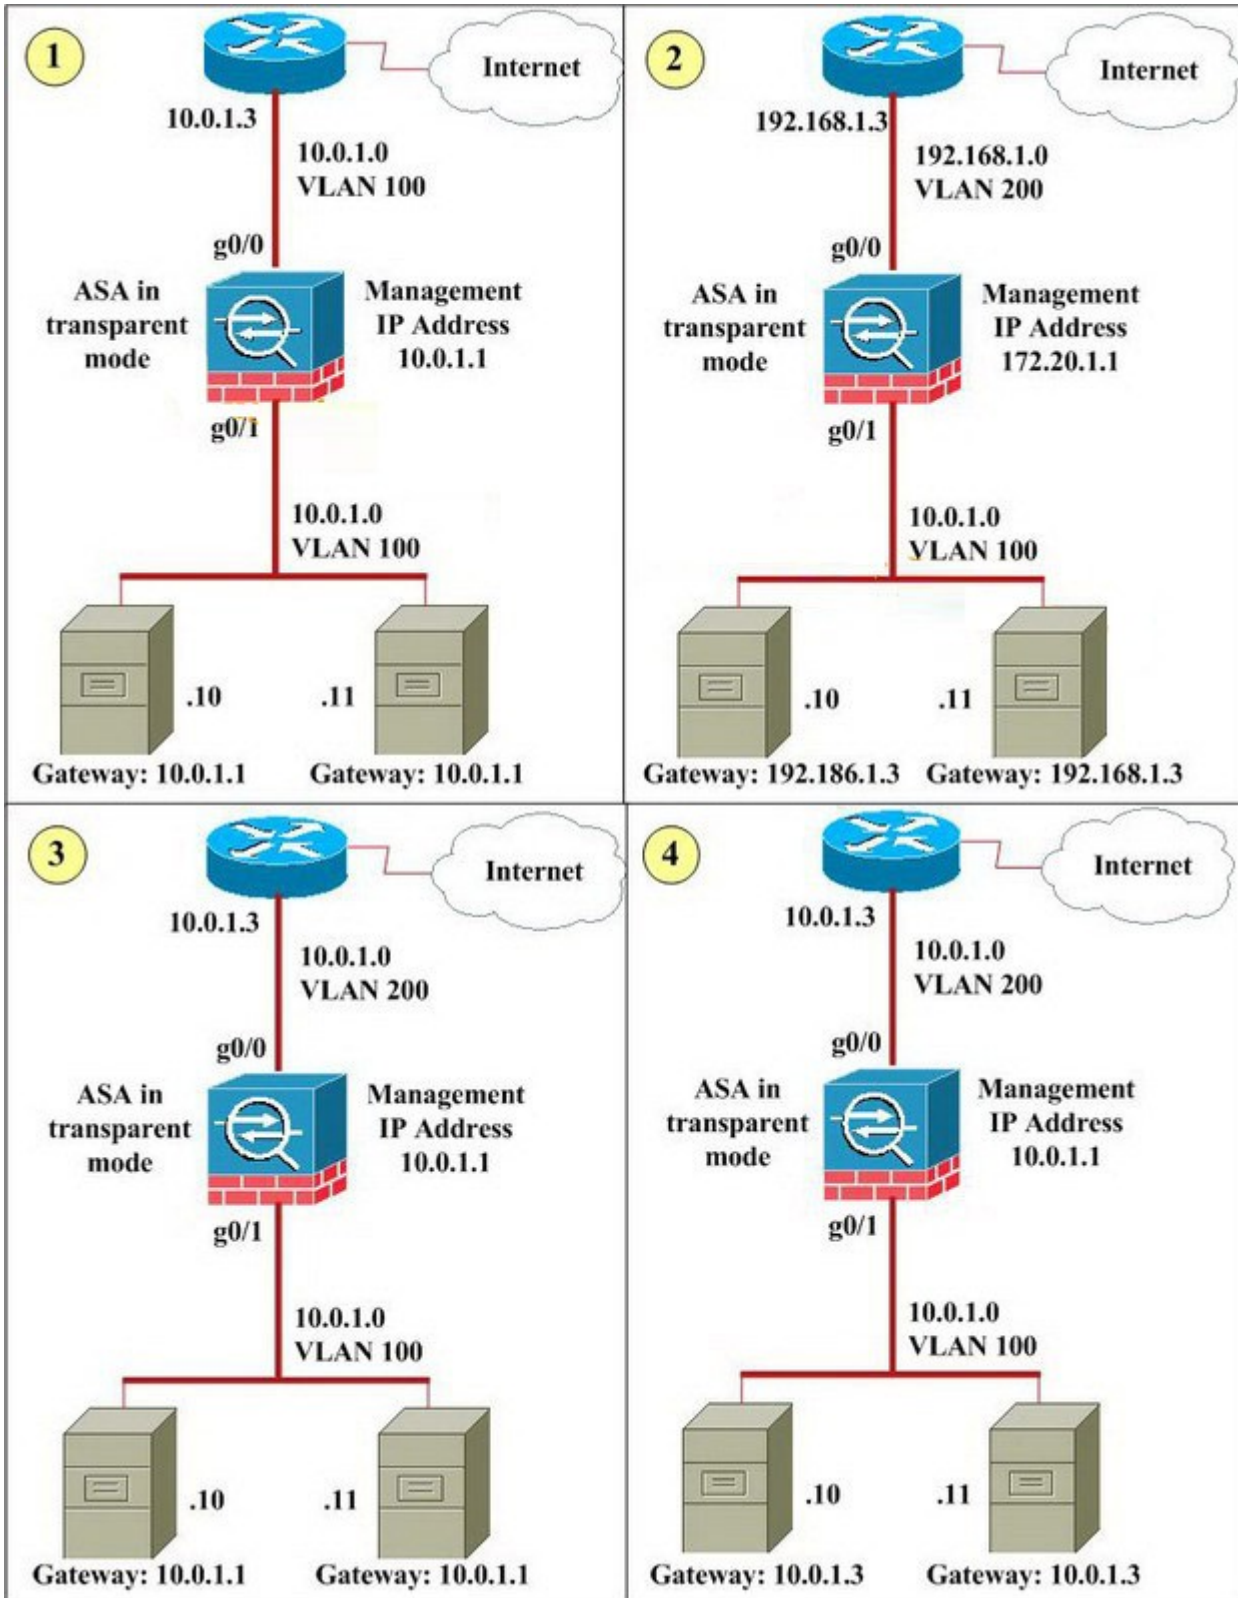

- A.1
- B.2
- C.3
- D.4


Correct:D

4.What is the effect of the per-user-override option when applied to the access-group command syntax?

- A.The log option in the per-user access list overrides existing interface log options.
- B.It allows for extended authentication on a per-user basis.
- C.It allows downloadable user access lists to override the access list applied to the interface.
- D.It increases security by building upon the existing access list applied to the interface. All subsequent users are also subject to the additional access list entries.

Correct:C

5.John works as a network administrator for the P4S company. According to the exhibit, the only traffic that John would like to allow through the corporate Cisco ASA adaptive security appliance is inbound HTTP to the DMZ network and all traffic from the inside network to the outside network. John also has configured the Cisco ASA adaptive security appliance, and access through it is now working as expected with one exception: contractors working on the DMZ servers have been surfing the Internet from the DMZ servers, which (unlike other Company XYZ hosts) are using public, routable IP addresses. Neither NAT statements nor access lists have been configured for the DMZ interface. What is the reason that the contractors are able to surf the Internet from the DMZ servers? (Note: The 192.168.X.X IP addresses are used to represent routable public IP addresses even though the 192.168.1.0 network is not actually a public routable network.)

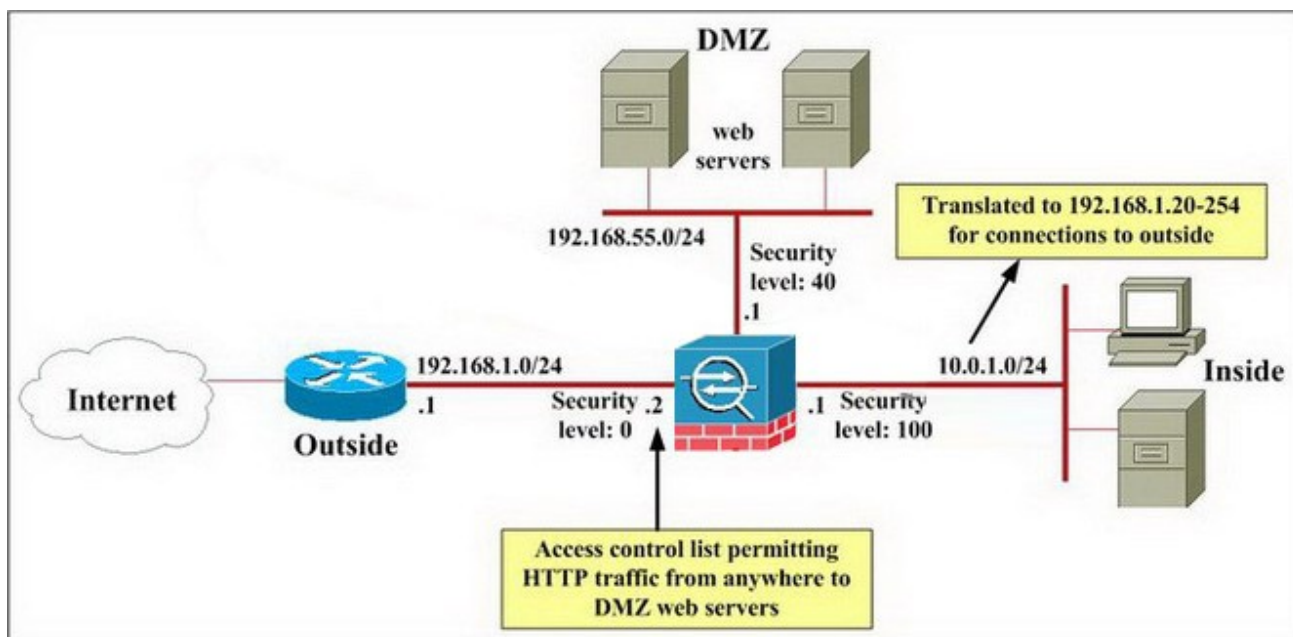

- A.An access list on the outside interface permits this traffic.
- B.NAT control is not enabled.
- C.The DMZ servers are using the same global pool of addresses that is being used by the inside hosts.
- D.HTTP inspection is not enabled.

Correct:B

6.In order to recover the Cisco ASA password, which operation mode should you enter?

- A.configure
- B.unprivileged
- C.privileged

D.monitor

Correct:D

7.Which three statements correctly describe protocol inspection on the Cisco ASA adaptive security appliance? (Choose three.)

- A.For the security appliance to inspect packets for signs of malicious application misuse, you must enable advanced (application layer) protocol inspection.
- B.If you want to enable inspection globally for a protocol that is not inspected by default or if you want to globally disable inspection for a protocol, you can edit the default global policy.
- C.The protocol inspection feature of the security appliance securely opens and closes negotiated ports and IP addresses for legitimate client-server connections through the security appliance.
- D.If inspection for a protocol is not enabled, traffic for that protocol may be blocked.

Correct:B C D

8.Observe the following commands, which one verifies that NAT is working normally and displays active NAT translations?

- A.show ip nat all
- B.show running-configuration nat
- C.show xlate
- D.show nat translation

Correct:C

9.Multimedia applications transmit requests on TCP, get responses on UDP or TCP, use dynamic ports, and use the same port for source and destination, so they can pose challenges to a firewall. Which three items are true about how the Cisco ASA adaptive security appliance handles multimedia applications? (Choose three.)

- A.It dynamically opens and closes UDP ports for secure multimedia connections, so you do not need to open a large range of ports.
- B.It supports SIP with NAT but not with PAT.
- C.It supports multimedia with or without NAT.
- D.It supports RTSP, H.323, Skinny, and CTIQBE.


Correct:A C D

10.What is the result if the WebVPN url-entry parameter is disabled?

- A.The end user is unable to access pre-defined URLs.
- B.The end user is unable to access any CIFS shares or URLs.
- C.The end user is able to access CIFS shares but not URLs.
- D.The end user is able to access pre-defined URLs.

Correct:D

11.You work as a network engineer at Pass4sure.com, you are asked to examine the current Modular Policy Framework configurations on the LA-ASA Adaptive Security Appliances using the Cisco Adaptive Security Device Manager (ASDM) utility. You need to answer the multiple-choice questions in this simulation by use of the appropriate Cisco ASDM configuration screens. A host on the partnernetwork attempts to use FTP to download a file from InsideHost,which resides on the inside interface of the security appliance.What does the security appliance do with the traffic from the partnernetwork host?

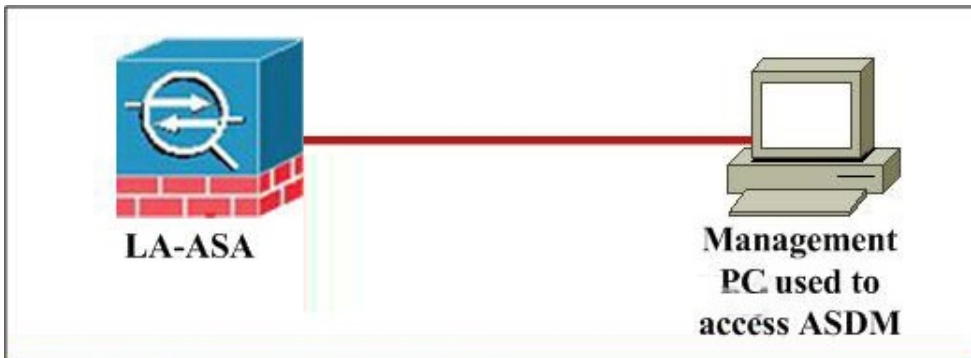

Cisco ASDM 6.0 for ASA-10.0.1.1

This screenshot shows the main dashboard of the Cisco ASDM 6.0 interface. It includes several panels:

- Device Information:** Host Name: LA-ASA, ASA Version: 6.8(2), ASDM Version: 6.8(2), Firewall Mode: Hosted, Total Flash: 64 MB, Device Uptime: 1d 5h 35m 12s, Device Type: ASA 5520, Context Mode: Single, Total Memory: 512 MB.
- Interface Status:** A table showing interface details:

Interface	IP Address/Mask	Line	Link	Up	Kbps
dmz_email	172.16.1.1/24		up	up	0
dmz_web	192.168.7.1/24		up	up	0
inside	10.0.1.1/24		up	up	3
outside	192.168.1.1/24		up	up	0
partneret	172.20.1.1/24		up	up	0
- System Resource Status:** CPU Usage (percent) and Memory Usage (MB) graphs.
- Traffic Status:** Connections Per Second Usage and Interface Traffic Usage (Kbps) graphs.
- Latest ASDM Syslog Messages:** A table of recent events:

Severity	Date	Time	Syslog ID	Source IP	Destination IP	Description
6	Jun 24 2008	14:58:21	725007	insideHost		SSL session with client inside insideHost(7259) terminated
6	Jun 24 2008	14:58:21	725007	insideHost		SSL session with client inside insideHost(7259) terminated

Cisco ASDM 6.0 for ASA-10.0.1.1

This screenshot shows the 'Access Rules' configuration page in the Cisco ASDM 6.0 interface. The left sidebar shows a tree view with 'Firewall' selected. The main area displays a table of access rules:

#	Enabled	Source	Destination	Service	Action	Hi	Lo	Ti	De
dmz_email (2 inspect incoming rules)									
1	☑	any	Any less secure n...	ip	☑ Permit				
2	☑	any	any	ip	☒ Deny				
dmz_web (2 incoming rules)									
1	☑	any	any	DNSServer	☑ Permit				
2	☑	any	any	ip	☒ Deny				Implic
inside (5 incoming rules)									
1	☑	inside-network/24	any	ftp	☑ Permit				
2	☑	inside-network/24	any	VoIP-SERVICES	☑ Permit				
3	☑	inside-network/24	any	echo	☑ Permit				
4	☑	any	PublicEmailServer	SERVICE-GROUP1	☑ Permit				
5	☑	any	DNSServer	domain	☑ Permit				
6	☑	any	any	ip	☒ Deny				Implic
outside (4 incoming rules)									
1	☑	any	192.168.1.4	ftp	☑ Permit				
2	☑	any	192.168.1.12	SERVICE-GROUP1	☑ Permit				
3	☑	any	any	echo-reply	☑ Permit				
4	☑	any	any	ip	☒ Deny				Implic
partneret (7 incoming rules)									
1	☑	partneret-network/24	172.20.1.10	ftp	☑ Permit				
2	☑	partneret-network/24	PublicEmailServer	SERVICE-GROUP1	☑ Permit				
3	☑	partneret-network/24	172.20.1.15	VoIP-SERVICES	☑ Permit				
4	☑	partneret-network/24	any	ftp	☑ Permit				
5	☑	partneret-network/24	DNSServer	domain	☑ Permit				

A.Sends it to the Cisco ASA Advanced Inspection and Prevention(AIP)-Security Services

Module(SSM)for inspection before forwarding it to its destination

B.Sends it to the Cisco ASA 5500 Series Content Security and Control(CSC)SSM for inspection before forwarding it to its destination

C.Forwards it directly to its destination

D.Forwards it directly to its destination unless the connection limit is already met

Correct:D

12.You work as a network engineer at Pass4sure.com, you are asked to examine the current Modular Policy Framework configurations on the LA-ASA Adaptive Security Appliances using the Cisco Adaptive Security Device Manager (ASDM) utility. You need to answer the multiple-choice questions in this simulation by use of the appropriate Cisco ASDM configuration screens. Which traffic does the security appliance inspect globally(regardless of the interface on which the traffic enters the security appliance)?(Choose 3)

LA-ASA

PassSure help you pass any IT exam!

Management PC used to access ASDM

Cisco ASDM 6.0 for ASA-10.0.1.1

Device Information

Host Name: LA-ASA	Device Uptime: 1d 5h 35m 12s
ASA Version: 8.6(2)	Device Type: ASA 5520
ASDM Version: 6.6(2)	Context Mode: Single
Firewall Mode: Floated	Total Memory: 512 MB
Total Flash: 64 MB	

Interface Status

Interface	IP Address/Mask	Line	Link	Flt/ps
dmt_email	172.16.1.1/24	0	up	0
dmt_web	192.168.7.1/24	0	up	0
inside	10.0.1.1/24	0	up	3
outside	192.168.1.2/24	0	up	0
partneret	172.20.1.1/24	0	up	0

System Resources Status

CPU Usage (percent): [Graph showing usage over time]

Memory Usage (MB): [Graph showing usage over time]

System Log

Severity	Date	Time	Source IP	Destination IP	Description
6	Jun 24 2008	14:55:21	725007	insideHost	SSL session with client inside insideHost(7255) terminated
6	Jun 24 2008	14:58:21	725007	insideHost	SSL session with client inside insideHost(7299) terminated


Cisco ASDM 6.0 for ASA-10.0.1.1

Configuration > Firewall > Access Rules

#	Enabled	Source	Destination	Service	Action	Hit	Lo	Ti	De
1	any	any	any	ip	Permit				
2	any	any	any	ip	Deny				
3	any	any	any	ip	Deny				Implic
4	any	any	any	ip	Deny				Implic
5	any	any	any	ip	Deny				Implic
6	any	any	any	ip	Deny				Implic
7	any	any	any	ip	Deny				Implic
8	any	any	any	ip	Deny				Implic
9	any	any	any	ip	Deny				Implic
10	any	any	any	ip	Deny				Implic
11	any	any	any	ip	Deny				Implic
12	any	any	any	ip	Deny				Implic
13	any	any	any	ip	Deny				Implic
14	any	any	any	ip	Deny				Implic
15	any	any	any	ip	Deny				Implic
16	any	any	any	ip	Deny				Implic
17	any	any	any	ip	Deny				Implic
18	any	any	any	ip	Deny				Implic
19	any	any	any	ip	Deny				Implic
20	any	any	any	ip	Deny				Implic
21	any	any	any	ip	Deny				Implic
22	any	any	any	ip	Deny				Implic
23	any	any	any	ip	Deny				Implic
24	any	any	any	ip	Deny				Implic
25	any	any	any	ip	Deny				Implic
26	any	any	any	ip	Deny				Implic
27	any	any	any	ip	Deny				Implic
28	any	any	any	ip	Deny				Implic
29	any	any	any	ip	Deny				Implic
30	any	any	any	ip	Deny				Implic
31	any	any	any	ip	Deny				Implic
32	any	any	any	ip	Deny				Implic
33	any	any	any	ip	Deny				Implic
34	any	any	any	ip	Deny				Implic
35	any	any	any	ip	Deny				Implic
36	any	any	any	ip	Deny				Implic
37	any	any	any	ip	Deny				Implic
38	any	any	any	ip	Deny				Implic
39	any	any	any	ip	Deny				Implic
40	any	any	any	ip	Deny				Implic
41	any	any	any	ip	Deny				Implic
42	any	any	any	ip	Deny				Implic
43	any	any	any	ip	Deny				Implic
44	any	any	any	ip	Deny				Implic
45	any	any	any	ip	Deny				Implic
46	any	any	any	ip	Deny				Implic
47	any	any	any	ip	Deny				Implic
48	any	any	any	ip	Deny				Implic
49	any	any	any	ip	Deny				Implic
50	any	any	any	ip	Deny				Implic

- A.HTTP
- B.DNS
- C.GTP
- D.H.323 H.225
- Correct:A B D**

13.You work as a network engineer at Pass4sure.com, you are asked to examine the current Modular Policy Framework configurations on the LA-ASA Adaptive Security Appliances using the Cisco Adaptive Security Device Manager (ASDM) utility. You need to answer the multiple-choice questions in this simulation by use of the appropriate Cisco ASDM configuration screens. A host on the partnet network makes a VoIP call to 172.20.1.15,which is statically mapped to an IP phone on the inside network.What does the security appliance do with the VoIP traffic between host 172.20.1.15 and the host on the partnet network?

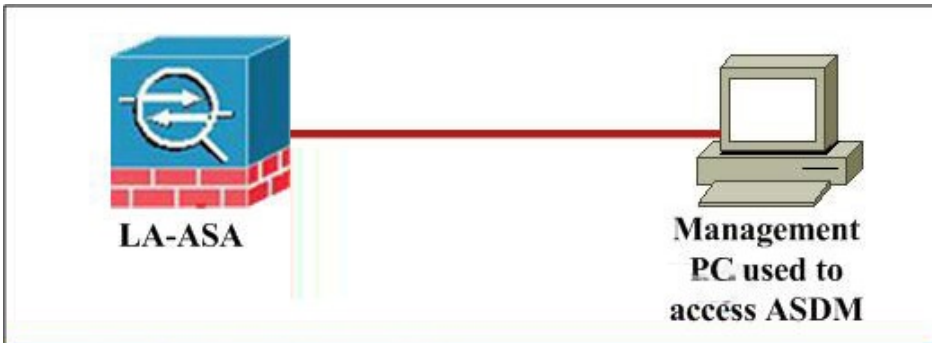

Cisco ASDM 6.0 for ASA-10.0.1.1

The screenshot shows the 'Home' page of the Cisco ASDM 6.0 interface. It includes several sections:

- Device Information:** Host Name: LA-ASA, ASA Version: 8.8(2), ASDM Version: 6.8(2), Firewall Mode: Routed, Total Flash: 64 MB, Device Uptime: 1d 5h 35m 12s, Device Type: ASA 5520, Context Mode: Single, Total Memory: 512 MB.
- Interface Status:** A table showing interface status for dmz_ether1, dmz_web, inside, outside, and partnet.
- VPN Tunnels:** Shows IKE, Phase, Clientless SSL VPN, and SSL VPN Client status.
- System Resources Status:** Includes CPU Usage (percent) and Memory Usage (MB) graphs.
- Network Status:** Shows Connections Per Second Usage and Outside Interface Traffic Usage (Pbps).
- Latest ASDM Syslog Messages:** A table of recent log entries.

Cisco ASDM 6.0 for ASA-10.0.1.1

The screenshot shows the 'Configuration > Firewall > Access Rules' page. It displays a table of access rules with columns for #, Enabled, Source, Destination, Service, Action, Hit, Lo, Tr, and De. The rules are organized by interface: dmz_ether1, dmz_web, inside, outside, and partnet. Each interface has a set of numbered rules with specific source and destination addresses and services.


#	Enabled	Source	Destination	Service	Action	Hit	Lo	Tr	De
1	any	Any less secure n...	ip	ip	Permit				
2	any	any	ip	ip	Deny				
1	any	DNSServer	any	domain	Permit				
2	any	any	ip	ip	Deny				Implic
1	inside-network/24	any	any	ftp	Permit				
2	inside-network/24	any	any	VoIP-SERVICES	Permit				
3	inside-network/24	any	any	echo	Permit				
4	any	PublicEmailServer	any	SERVICE-GROUP1	Permit				
5	any	DNSServer	any	domain	Permit				
6	any	any	ip	ip	Deny				Implic
1	any	192.168.1.14	any	ftp	Permit				
2	any	192.168.1.12	any	SERVICE-GROUP1	Permit				
3	any	any	any	echo-reply	Permit				
4	any	any	ip	ip	Deny				Implic
1	partnet-network/24	172.20.1.10	any	ftp	Permit				
2	partnet-network/24	PublicEmailServer	any	SERVICE-GROUP1	Permit				
3	partnet-network/24	172.20.1.15	any	VoIP-SERVICES	Permit				
4	partnet-network/24	any	any	ftp	Permit				
5	partnet-network/24	DNSServer	any	domain	Permit				

- A. Sends it to the AIP-SSM for inspection before forwarding it to its destination
- B. Sends it to the CSC-SSM for inspection before forwarding it to its destination
- C. Forwards it directly to its destination unless the connection limit is already met

D.Applies low latency queuing as it exits the partnernet interface

Correct:D

14.You work as a network engineer at Pass4sure.com, you are asked to examine the current Modular Policy Framework configurations on the LA-ASA Adaptive Security Appliances using the Cisco Adaptive Security Device Manager (ASDM) utility. You need to answer the multiple-choice questions in this simulation by use of the appropriate Cisco ASDM configuration screens. A host on the outside network sends e-mail to the public e-mail server.What does the security appliance do with the traffic from the outside host?

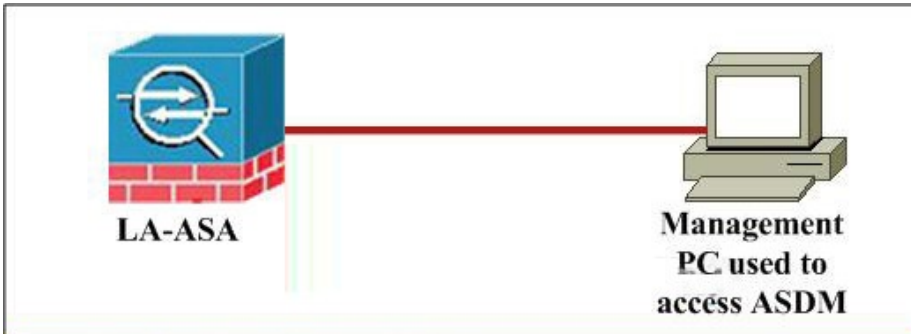

Cisco ASDM 6.0 for ASA-10.0.1.1

The screenshot shows the Cisco ASDM 6.0 Home page. The top navigation bar includes "Home", "Device Dashboard", "Firewall Dashboard", and "Intrusion Prevention". The main content area is divided into several sections:

- General | License:** Host Name: LA-ASA, ASA Version: 8.9(2), ASDM Version: 6.9(2), Firewall Mode: Floated, Total Flash: 64 MB, Device Uptime: 1d 5h 35m 12s, Device Type: ASA 5528, Context Mode: Single, Total Memory: 512 MB.
- Interface Status:** A table showing interface details:

Interface	IP Address/Mask	Line	Link	Kbps
dmz_email	172.16.1.1/24	up	up	0
dmz_web	192.168.7.1/24	up	up	0
inside	10.0.1.1/24	up	up	3
outside	192.168.1.2/24	up	up	0
partnerat	172.20.1.1/24	up	up	0
- Traffic Status:** Connections Per Second Usage and Outside Interface Traffic Usage (Kbps) charts.
- System Resources Status:** CPU Usage (percent) and Memory Usage (MB) graphs.
- Event Log:** A table showing system messages:

Severity	Date	Time	System ID	Source IP	Destination IP	Description
6	Jun 24 2008	14:55:21	725007	inside-host		SSL session with client inside/inside-host/2259 terminated
6	Jun 24 2008	14:58:21	725007	inside-host		SSL session with client inside/inside-host/2298 terminated

Cisco ASDM 6.0 for ASA-10.0.1.1

The screenshot shows the Cisco ASDM 6.0 Configuration page for Firewall Access Rules. The left sidebar contains a navigation tree with categories like "Access Rules", "Service Policy Rules", "AAA Rules", "Filter Rules", "URL Filtering Servers", "Threat Detection", "Objects", "Network Object Groups", "Service Groups", "Class Maps", "Inspect Maps", "Regular Expressions", "TCP Maps", "Global Pools", "Time Ranges", and "Advanced". The main content area displays a table of access rules:


#	Enabled	Source	Destination	Service	Action	Hi.	Lo.	Ti.	De
dmz_email (2 implicit incoming rules)									
1	<input checked="" type="checkbox"/>	any	Any less secure n...	ip	Permit				
2	<input checked="" type="checkbox"/>	any	any	ip	Deny				
dmz_web (2 incoming rules)									
1	<input checked="" type="checkbox"/>	any	DNSServer	domain	Permit				
2	<input checked="" type="checkbox"/>	any	any	ip	Deny				Implic
inside (3 incoming rules)									
1	<input checked="" type="checkbox"/>	inside-network/24	any	ftp	Permit				
2	<input checked="" type="checkbox"/>	inside-network/24	any	VoIP-SERVICES	Permit				
3	<input checked="" type="checkbox"/>	inside-network/24	any	echo	Permit				
4	<input checked="" type="checkbox"/>	any	PublicEmailServer	SERVICE-GROUP1	Permit				
5	<input checked="" type="checkbox"/>	any	DNSServer	domain	Permit				
6	<input checked="" type="checkbox"/>	any	any	ip	Deny				Implic
outside (4 incoming rules)									
1	<input checked="" type="checkbox"/>	any	192.168.1.4	ftp	Permit				
2	<input checked="" type="checkbox"/>	any	192.168.1.12	SERVICE-GROUP1	Permit				
3	<input checked="" type="checkbox"/>	any	any	echo-reply	Permit				
4	<input checked="" type="checkbox"/>	any	any	ip	Deny				Implic
partnerat (7 incoming rules)									
1	<input checked="" type="checkbox"/>	partnerat-network/24	172.26.1.10	ftp	Permit				
2	<input checked="" type="checkbox"/>	partnerat-network/24	PublicEmailServer	SERVICE-GROUP1	Permit				
3	<input checked="" type="checkbox"/>	partnerat-network/24	172.20.1.15	VoIP-SERVICES	Permit				
4	<input checked="" type="checkbox"/>	partnerat-network/24	any	ftp	Permit				
5	<input checked="" type="checkbox"/>	partnerat-network/24	DNSServer	domain	Permit				

- A. Sends it to the AIP-SSM for inspection before forwarding it to its destination
- B. Sends it to the CSC-SSM for inspection before forwarding it to its destination
- C. Forwards it directly to its destination

D.Forwards it directly to its destination unless the connection limit is already met

Correct:A

15.You work as a network engineer at Pass4sure.com, you are asked to examine the current Modular Policy Framework configurations on the LA-ASA Adaptive Security Appliances using the Cisco Adaptive Security Device Manager (ASDM) utility. You need to answer the multiple-choice questions in this simulation by use of the appropriate Cisco ASDM configuration screens. A host on the partnernetwork attempts to access the public web server via HTTP.What does the security appliance do with traffic from the partnernetwork?

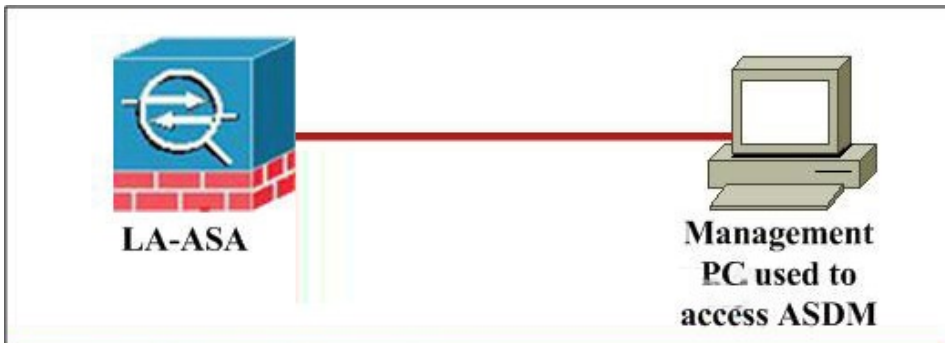

Cisco ASDM 6.0 for ASA-10.0.1.1

The screenshot shows the "Home" page of the Cisco ASDM 6.0 interface. It includes several sections:

- Device Information:** Host Name: LA-ASA, ASA Version: 8.6(7), ASDM Version: 6.9(7), Firewall Mode: Routed, Total Flash: 64 MB, Device Uptime: 1d 5h 35m 12s, Device Type: ASA 5520, Config Mode: Single, Total Memory: 512 MB.
- Interface Status:** A table showing interface status for dmz_email, dmz_web, inside, outside, and partnetat.
- VPN Tunnels:** KE, IPsec, Clientless SSL VPN, and SSL VPN Client.
- System Performance Status:** CPU and Memory usage graphs.
- Traffic Status:** Connections Per Second Usage and Interface Traffic Usage graphs.
- Event ASDM System Messages:** A table of system messages.

Cisco ASDM 6.0 for ASA-10.0.1.1

The screenshot shows the "Configuration > Firewall > Access Rules" page. It displays a table of access rules with columns for #, Enabled, Source, Destination, Service, Action, Hit, Log, Tr, and De.

#	Enabled	Source	Destination	Service	Action	Hit	Log	Tr	De
dmz_email (2 applied incoming rules)									
1	<input checked="" type="checkbox"/>	any	Any/less secure n...	ip	Permit				
2	<input checked="" type="checkbox"/>	any	any	ip	Deny				
dmz_web (2 incoming rules)									
1	<input checked="" type="checkbox"/>	any	any	domain	Permit				
2	<input checked="" type="checkbox"/>	any	any	ip	Deny				Implic
inside (5 incoming rules)									
1	<input checked="" type="checkbox"/>	inside-network/24	any	ftp	Permit				
2	<input checked="" type="checkbox"/>	inside-network/24	any	VoIP-SERVICES	Permit				
3	<input checked="" type="checkbox"/>	inside-network/24	any	echo	Permit				
4	<input checked="" type="checkbox"/>	any	PublicEmailServer	SERVICE-GROUP1	Permit				
5	<input checked="" type="checkbox"/>	any	CNServer	domain	Permit				
6	<input checked="" type="checkbox"/>	any	any	ip	Deny				Implic
outside (4 incoming rules)									
1	<input checked="" type="checkbox"/>	any	192.168.1.14	ftp	Permit				
2	<input checked="" type="checkbox"/>	any	192.168.1.12	SERVICE-GROUP1	Permit				
3	<input checked="" type="checkbox"/>	any	any	echo-reply	Permit				
4	<input checked="" type="checkbox"/>	any	any	ip	Deny				Implic
partnetat (7 incoming rules)									
1	<input checked="" type="checkbox"/>	partnetat-network/24	172.26.1.10	ftp	Permit				
2	<input checked="" type="checkbox"/>	partnetat-network/24	PublicEmailServer	SERVICE-GROUP1	Permit				
3	<input checked="" type="checkbox"/>	partnetat-network/24	172.20.1.15	VoIP-SERVICES	Permit				
4	<input checked="" type="checkbox"/>	partnetat-network/24	any	ftp	Permit				
5	<input checked="" type="checkbox"/>	partnetat-network/24	CNServer	domain	Permit				


- A.Sends it to the AIP-SSM for inspection before forwarding it to its destination
- B.Sends it to the CSC-SSM for inspection before forwarding it to its destination

C.Forwards it directly to its destination

D.Forwards it directly to its destination unless the connection limit is already met

Correct:C

16.You work as a network engineer at Pass4sure.com, you are asked to examine the current Modular Policy Framework configurations on the LA-ASA Adaptive Security Appliances using the Cisco Adaptive Security Device Manager (ASDM) utility. You need to answer the multiple-choice questions in this simulation by use of the appropriate Cisco ASDM configuration screens. A host on the outside network makes a VoIP call to a host on the inside network.What does the security appliance do with the traffic from the host on the outside network?

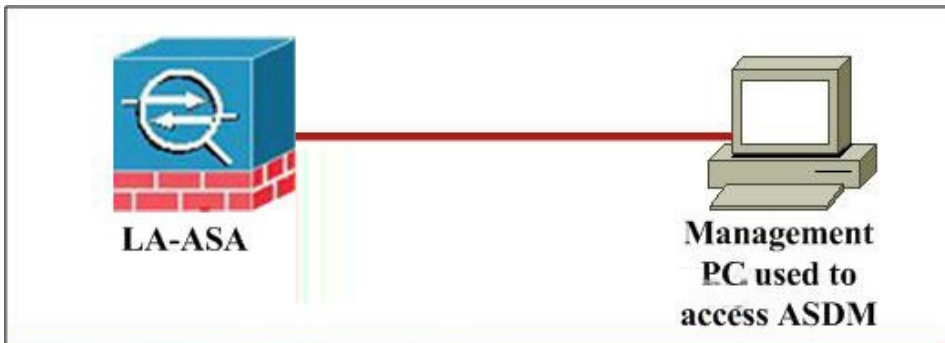

Cisco ASDM 6.0 for ASA-10.0.1.1

The screenshot shows the "Home" page of the Cisco ASDM 6.0 interface. It includes several sections:

- Device Information:** Host Name: LA-ASA, ASA Version: 8.6(7), ASDM Version: 6.9(7), Firewall Mode: Routed, Total Flash: 64 MB, Device Uptime: 1d 5h 35m 12s, Device Type: ASA 5520, Config Mode: Single, Total Memory: 512 MB.
- Interface Status:** A table showing interface status for dmz_email, dmz_web, inside, outside, and partnetat.
- VPN Tunnels:** KE, IPsec, Clientless SSL, VPN, SSL, VPN Client.
- System Performance Status:** CPU and Memory usage graphs.
- Traffic Status:** Connections Per Second Usage and Interface Traffic Usage graphs.
- Event ASDM System Messages:** A table of system messages.

Cisco ASDM 6.0 for ASA-10.0.1.1

The screenshot shows the "Configuration > Firewall > Access Rules" page. It displays a table of access rules with columns for #, Enabled, Source, Destination, Service, Action, Hit, Log, Tr, and De.

#	Enabled	Source	Destination	Service	Action	Hit	Log	Tr	De
dmz_email (2 applied incoming rules)									
1	<input checked="" type="checkbox"/>	any	Any/less secure n...	ip	Permit				
2	<input checked="" type="checkbox"/>	any	any	ip	Deny				
dmz_web (2 incoming rules)									
1	<input checked="" type="checkbox"/>	any	any	domain	Permit				
2	<input checked="" type="checkbox"/>	any	any	ip	Deny				Implic
inside (5 incoming rules)									
1	<input checked="" type="checkbox"/>	inside-network/24	any	ftp	Permit				
2	<input checked="" type="checkbox"/>	inside-network/24	any	VoIP-SERVICES	Permit				
3	<input checked="" type="checkbox"/>	inside-network/24	any	echo	Permit				
4	<input checked="" type="checkbox"/>	any	PublicEmailServer	SERVICE-GROUP1	Permit				
5	<input checked="" type="checkbox"/>	any	CNServer	domain	Permit				
6	<input checked="" type="checkbox"/>	any	any	ip	Deny				Implic
outside (4 incoming rules)									
1	<input checked="" type="checkbox"/>	any	192.168.1.14	ftp	Permit				
2	<input checked="" type="checkbox"/>	any	192.168.1.12	SERVICE-GROUP1	Permit				
3	<input checked="" type="checkbox"/>	any	any	echo-reply	Permit				
4	<input checked="" type="checkbox"/>	any	any	ip	Deny				Implic
partnetat (7 incoming rules)									
1	<input checked="" type="checkbox"/>	partnetat-network/24	172.26.1.10	ftp	Permit				
2	<input checked="" type="checkbox"/>	partnetat-network/24	PublicEmailServer	SERVICE-GROUP1	Permit				
3	<input checked="" type="checkbox"/>	partnetat-network/24	172.20.1.15	VoIP-SERVICES	Permit				
4	<input checked="" type="checkbox"/>	partnetat-network/24	any	ftp	Permit				
5	<input checked="" type="checkbox"/>	partnetat-network/24	CNServer	domain	Permit				

- A.Sends it to the AIP-SSM for inspection before forwarding it to its destination
- B.Sends it to the CSC-SSM for inspection before forwarding it to its destination

C.Forwards it directly to its destination

D.Drops it

Correct:D

17.Which three tunneling protocols and methods are supported by the Cisco VPN Client? (Choose three.)

A.IPsec over TCP

B.IPsec over UDP

C.ESP

D.AH

Correct:A B C

18.Which two options are correct about the impacts of this configuration? (Choose two.)

```
class-map INBOUND_HTTP_TRAFFIC match access-list TOINSIDEHOST
class-map OUTBOUND_HTTP_TRAFFIC match access-list TOOUTSIDEHOST
policy-map MYPOLICY
class INBOUND_HTTP_TRAFFIC inspect http set connection conn-max 100
policy-map MYOTHERPOLICY
class OUTBOUND_HTTP_TRAFFIC inspect http
service-policy MYOTHERPOLICY interface inside
service-policy MYPOLICY interface outside
```

A.Traffic that matches access control list TOINSIDEHOST is subject to HTTP inspection and maximum connection limits.

B.Traffic that enters the security appliance through the inside interface is subject to HTTP inspection.


C.Traffic that enters the security appliance through the outside interface and matches access control list TOINSIDEHOST is subject to HTTP inspection and maximum connection limits.

D.Traffic that enters the security appliance through the inside interface and matches access control list TOOUTSIDEHOST is subject to HTTP inspection.


Correct:C D

19.Take the following configuration shown in the exhibit carefully, what traffic will be logged to the AAA server?

Cisco ASDM 6.0 for ASA-10.0.1.1

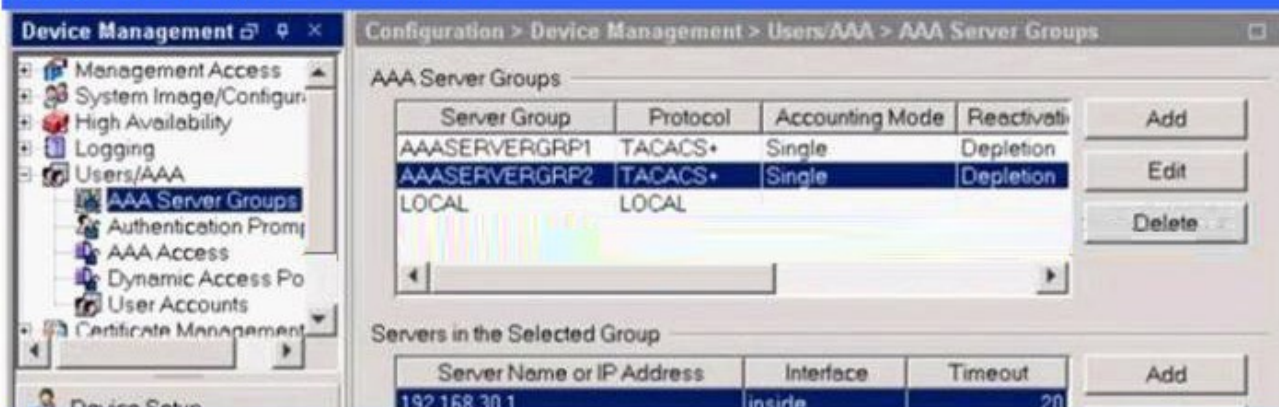

Cisco ASDM 6.0 for ASA-10.0.1.1

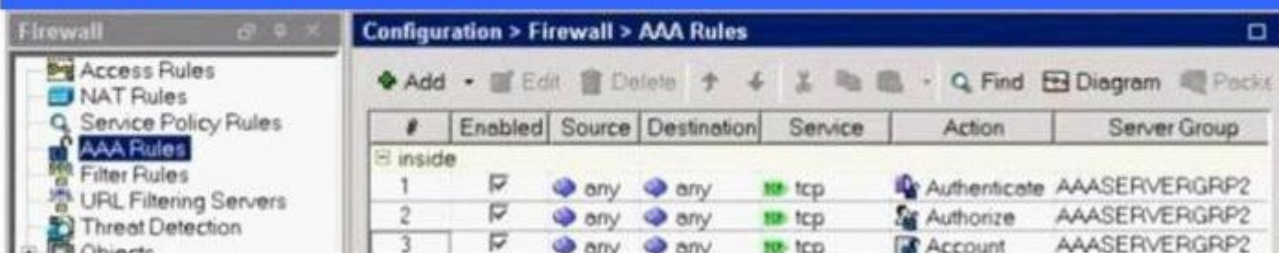

- A. Only authenticated and authorized console connection information will be logged in the accounting database.
- B. All outbound TCP connection information will be logged in the accounting database.
- C. No information will be logged. This is not a valid configuration because TACACS+ connection information cannot be captured and logged.
- D. All connection information will be logged in the accounting database.

Correct: B

20. What are the two purposes of the same-security-traffic permit intra-interface command? (Choose two.)

- A. It allows all of the VPN spokes in a hub-and-spoke configuration to be terminated on a single interface.
- B. It enables Dynamic Multipoint VPN.
- C. It permits communication in and out of the same interface when the traffic is IPsec protected.
- D. It allows communication between different interfaces that have the same security level

Correct: A C