

The logo for Exam Good, with the word 'EXAMGOOD' in a bold, sans-serif font. Each letter is a different color: E (black), X (pink), A (blue), M (green), G (orange), O (orange), O (orange), D (orange).

QUESTION & ANSWER

Exam Good provides update free of charge in one year!

The background of the page is a large, abstract geometric pattern composed of various colored triangles and polygons. The colors include shades of purple, red, orange, yellow, and blue, arranged in a way that creates a sense of depth and movement.

Accurate study guides
High passing rate!

<http://www.examgood.com>

Exam : **642-737**

Title : Implementing Advanced
Cisco Unified Wireless

Version : DEMO

1.Which two considerations must a network engineer have when planning for voice over wireless roaming?
(Choose two.)

- A. Roaming with only 802.1x authentication requires full reauthentication.
- B. Full reauthentication introduces gaps in a voice conversation.
- C. Roaming occurs when e phone has seen at least four APs.
- D. Roaming occurs when the phone has reached -80 dBs or below.

Answer: A,B

2.Which three of the items listed are required configuration parameters for the WLC to enable NAC out-of-band single sign-on when implementing NAC appliances? (Choose three.)

- A. EAP authentication
- B. web authentication
- C. SNMP
- D. RADIUS accounting
- E. WLAN > SNMP NAC enabled
- F. WLAN > RADIUS NAC enabled


Answer: C,D,E

3.An engineer is responding to a man-in-the-middle attack and needs to enable security features to prevent such attacks in the future. What security feature would prevent a manin-the-middle attack?

- A. Management Frame Protection
- B. ACL
- C. Enable client and infrastructure MFP
- D. AAA Override

Answer: C

4.Refer to the exhibit.

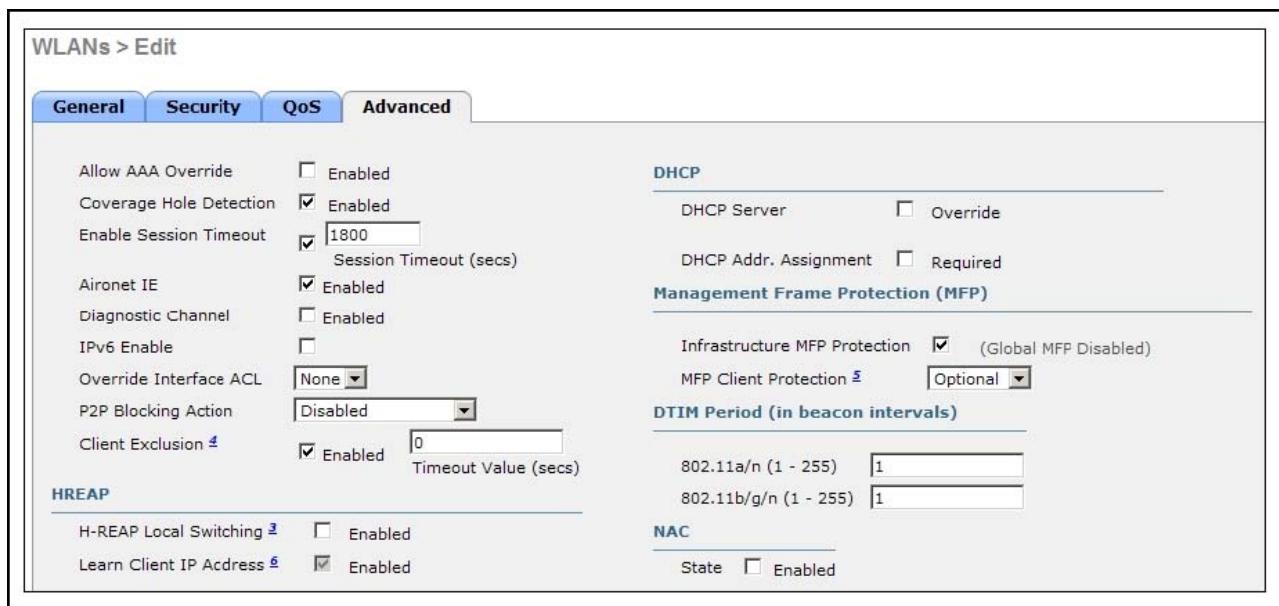

What is the effect of setting Client Exclusion to Enabled and set to a Timeout Value of 0 seconds in a Cisco WLC v7.0?

- A. Excluded clients must be manually removed from the excluded list.
- B. Client exclusion will not occur.
- C. Client exclusion timeout will be determined by the IDS module.
- D. Clients will only be disconnected and not excluded.

Answer: A

5.What NAC appliance component is configured to create user roles, meet remediation requirements, and handle checking for device compliance?

- A. NGS
- B. NAA
- C. NAS
- D. NAM

Answer: D